

# E2EF



## Metal Head for long-distance Detection that Withstands Harsh Environments Where the Workpiece Can Rub against the Sensor

- Completely stainless-steel housing
- Long-distance detection equivalent to or greater than Proximity Sensors with Resin Heads \*1
- More than 20 times \*2 the durability of Proximity Sensors with Resin Heads
- Spatter-resistant Models with fluororesin coating are available.
- Aluminum chip immunity
- Pre-wired Smartclick Connector Models are also available.

\*1. The actual sensing distance will vary with the size or material of the object.  
For details, refer to Engineering Data.

\*2. Test results for stainless-steel brush rotating at 130 rpm.



Be sure to read *Safety Precautions* on page 4.

Note: Models with a fluororesin coating also use vinyl chloride for the cable material and require separate protection.

## Ordering Information

### Sensors [Refer to Dimensions on page 5.]

#### Standard Models (Completely stainless-steel housing)

Connection method	Appearance	Sensing distance	Output	Operation mode	Model
Pre-wired Models (2m)		M8  2mm	DC 2-Wire (polarity)	NO	E2EF-X2D1 2M
		M12  3mm			E2EF-X3D1 2M
		M18  7mm			E2EF-X7D1 2M
		M30  12mm			E2EF-X12D1 2M
Pre-wired Smartclick Connector Models (M12)		M8  2mm			E2EF-X2D1-M1TGJ 0.3M
		M12  3mm			E2EF-X3D1-M1TGJ 0.3M
		M18  7mm			E2EF-X7D1-M1TGJ 0.3M
		M30  12mm			E2EF-X12D1-M1TGJ 0.3M

#### Spatter-resistant Models (Completely stainless-steel housing with fluororesin coating)

Connection method	Appearance	Sensing distance	Output	Operation mode	Model
Pre-wired Models (2m)		M8  2mm	DC 2-Wire (polarity)	NO	E2EF-QX2D1 2M
		M12  3mm			E2EF-QX3D1 2M
		M18  7mm			E2EF-QX7D1 2M
		M30  12mm			E2EF-QX12D1 2M
Pre-wired Smartclick Connector Models (M12)		M8  2mm			E2EF-QX2D1-M1TGJ 0.3M
		M12  3mm			E2EF-QX3D1-M1TGJ 0.3M
		M18  7mm			E2EF-QX7D1-M1TGJ 0.3M
		M30  12mm			E2EF-QX12D1-M1TGJ 0.3M

Note: Vinyl chloride is used for the cable material, and separate protection is required.

### Accessories (Order Separately)

#### Sensor I/O Connectors

#### Smart Click Connectors

Cable connection direction	Cable specifications	Cable length	No. of cable conductors	Model	Applicable Proximity Sensor model number
	Flame-retardant, flexible cable	2m	4	XS5F-D421-D80-F	E2EF-X□D1-M1TGJ
		5m	4	XS5F-D421-G80-F	E2EF-QX□D1-M1TGJ

Note: Refer to *Sensor I/O Connector/Sensor Controller* on your OMRON website for details.

# Ratings and Specifications

Item	Size Shielded Exterior Model	M8		M12		M18		M30	
		Shielded							
		Completely stainless-steel housing	Fluororesin coating	Completely stainless-steel housing	Fluororesin coating	Completely stainless-steel housing	Fluororesin coating	Completely stainless-steel housing	Fluororesin coating
		E2EF-X2D1 (-M1TGJ)	E2EF-QX2D1 (-M1TGJ)	E2EF-X3D1 (-M1TGJ)	E2EF-QX3D1 (-M1TGJ)	E2EF-X7D1 (-M1TGJ)	E2EF-QX7D1 (-M1TGJ)	E2EF-X12D1 (-M1TGJ)	E2EF-QX12D1 (-M1TGJ)
<b>Sensing distance</b>		2mm±10%		3mm±10%		7mm±10%		12mm±10%	
<b>Set distance</b>		0 to 1.4 mm		0 to 2.1mm		0 to 4.9mm		0 to 8.4mm	
<b>Differential travel</b>		15% max. of sensing distance							
<b>Sensing object</b>		Ferrous metal (The sensing distance decreases with non-ferrous metal. Refer to Engineering Data on page 6.)							
<b>Standard sensing object</b>		Iron, 12 × 12 × 1 mm		Iron, 12 × 12 × 1 mm		Iron, 30 × 30 × 1 mm		Iron, 54 × 54 × 1 mm	
<b>Response frequency *</b>		200Hz		80Hz		100Hz		50Hz	
<b>Power supply voltage</b>		10 to 30 VDC, ripple (p-p) : 10% max.							
<b>Leakage current</b>		0.8 mA max.							
<b>Output configuration</b>		With polarity							
<b>Control output</b>	<b>Switching capacity</b>	3 to 100 mA							
	<b>Residual voltage</b>	3 V max.(Load current : 100 mA max., Cable length : 2 m)							
<b>Indicators</b>		Operation indicator (red LED), Setting indicator (green LED)							
<b>Operation mode (with sensing object approaching)</b>		NO(normally open)							
<b>Protection circuits</b>		Surge suppressor, Load short-circuit protection							
<b>Ambient temperature range</b>		Operating : -10 to 70°C, Storage : -25 to 70°C (with no icing or condensation)							
<b>Ambient humidity range</b>		Operating/Storage : 35% to 95% (with no condensation)							
<b>Temperature influence</b>		±20% max. of sensing distance at 23°C in the temperature range of -10 to 70°C.							
<b>Voltage influence</b>		±1% max. of sensing distance at rated voltage in the rated voltage ±15% range							
<b>Insulation resistance</b>		50 MΩ min. (at 500 VDC) between current-carrying parts and case							
<b>Dielectric strength</b>		1,000 VAC, 50/60 Hz for 1 minute between current-carrying parts and case							
<b>Vibration resistance</b>		Destruction : 10 to 55 Hz, 1.5-mm double amplitude for 2 hours each in X, Y, and Z directions							
<b>Shock resistance</b>		Destruction : 500 m/s <sup>2</sup> 10 times each in X, Y, and Z directions		Destruction : 1,000 m/s <sup>2</sup> 10 times each in X, Y, and Z directions					
<b>Degree of protection</b>		IEC 60529 IP67							
<b>Connection method</b>		Unmarked : Pre-wired Models (Standard cable length : 2 m) Models ending with -M1TGJ : Pre-wired Connector Models (Standard cable length : 300 mm)							
<b>Weight (packed state)</b>	<b>Pre-wired Models (2 m)</b>	Approx. 105 g		Approx. 190 g		Approx. 215 g		Approx. 295 g	
	<b>Pre-wired Connector Models</b>	Approx. 65 g		Approx. 85 g		Approx. 110 g		Approx. 190 g	
<b>Materials</b>	<b>Case</b>	Stainless steel (SUS303) (E2EF-QX□ : Fluororesin coating)							
	<b>Sensing surface (thickness)</b>	Stainless steel (SUS303) (E2EF-QX□ : Fluororesin coating) 0.2mm		0.4mm		0.4mm		0.5mm	
	<b>Clamping nuts</b>	Stainless steel (SUS303) (E2EF-QX□ : Fluororesin coating)							
	<b>Toothed washer</b>	Zinc-plated iron							
	<b>Cable</b>	PVC (flame retardant)							
<b>Accessories</b>		Instruction manual							

\* The response frequency of the DC switching section is an average value. Measurement conditions are as follows: standard sensing object, a distance of twice the standard sensing object, and a set distance of half the sensing distance.

## I/O Circuit Diagrams


Operation mode	Model	Timing chart	Output circuit
NO	E2EF-(Q)X□D1 (-M1TGJ)	<p>The timing chart shows a sensing object moving through three areas: Non-sensing area, Unstable sensing area, and Stable sensing area. The 'Set position' is marked at the start of the stable area. The x-axis represents distance in % (0 to 100), and the y-axis represents time. Three output signals are shown: Setting indicator (green) turns ON at the set position and OFF (green) when the object leaves the sensing area; Operation indicator (red) turns ON when the object enters the sensing area and OFF (red) when it leaves; Control output turns ON when the object enters the sensing area and OFF when it leaves.</p>	<p>The output circuit diagram shows a proximity sensor main circuit connected to a load. Pin 1 (Brown) is connected to the load, and Pin 4 (Blue) is connected to 0V. The load is connected between pins 1 and 4. The power supply is 10 to 30 VDC. A note states: 'Note: The load can be connected to either the +V or 0 V side.' A pin arrangement diagram shows pins 1, 2, 3, and 4, with a note: 'Note: Pins 2 and 3 are not used.'</p>

# E2EF

## Engineering Data (Reference Value)


### Sensing Area

E2EF-X□  
-QX□

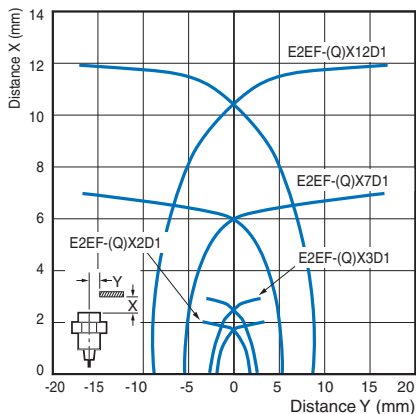


### Influence of Sensing Object Size and Material


E2EF-X2D1  
-QX2D1

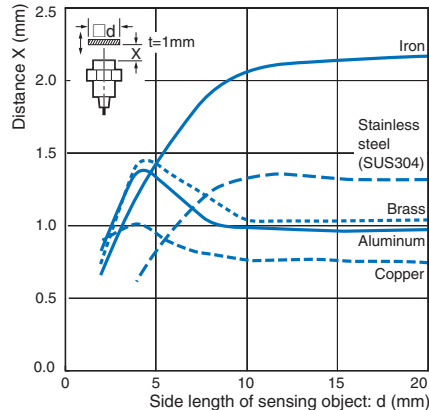


E2EF-X3D1  
-QX3D1

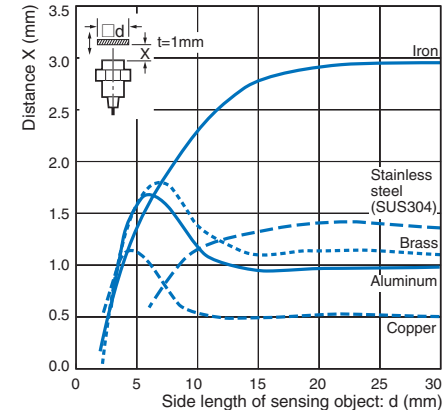

E2EF-X7D1  
-QX7D1

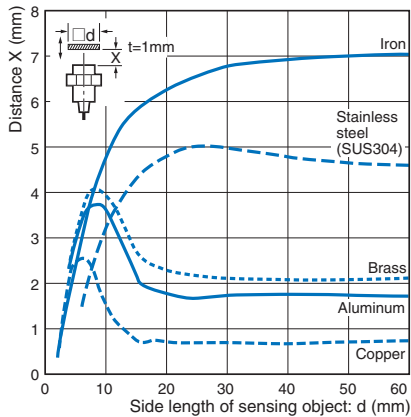


E2EF-X12D1  
-QX12D1

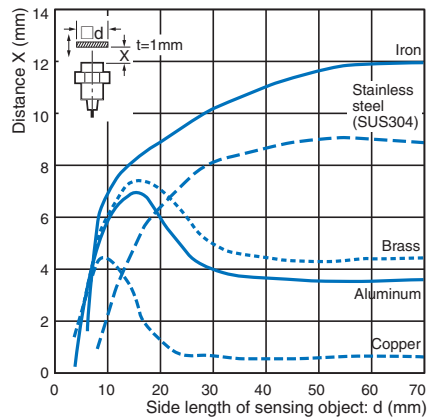


### Leakage Current

E2EF-X□D1

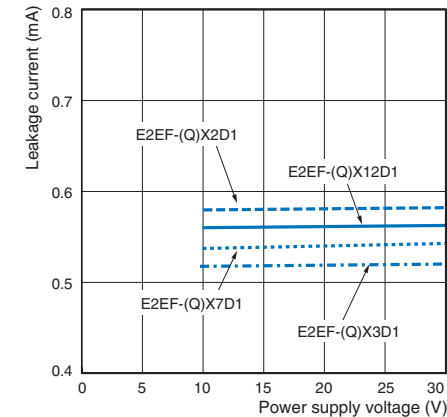

### Residual Output Voltage

E2EF-X□D1  
-QX□D1

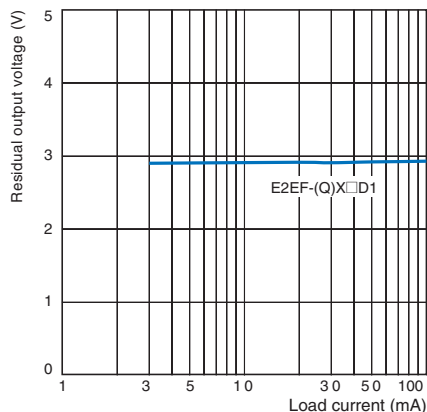

## Safety Precautions

### ⚠ WARNING

This product is not designed or rated for ensuring safety of persons either directly or indirectly. Do not use it for such purposes.



Never use this product with an AC power supply. Otherwise, explosion may result.



### Precautions for Safe Use

The following precautions must be observed to ensure safe operation.

- Do not use the Sensor in an environment where inflammable or explosive gas is present.
- Do not attempt to disassemble, repair, or modify any Sensors.
- Power Supply Voltage  
Do not use a voltage that exceeds the rated operating voltage range. Applying a voltage that is higher than the operating voltage range may result in explosion or fire.
- Incorrect Wiring  
Be sure that the power supply polarity and other wiring is correct. Incorrect wiring may cause explosion or fire.
- Connection without a Load  
If the power supply is connected directly without a load, the internal elements may explode or burn. Be sure to insert a load when connecting the power supply.

### Precautions for Correct Use


Do not use the Sensor under ambient conditions that exceed the ratings.

- Do not use the Sensor in the following locations.
  - Outdoor locations directly subject to sunlight, rain, snow, or water droplets
  - Locations subject to atmospheres with chemical vapors, in particular solvents and acids
  - Locations subject to corrosive gas
- The Sensor may malfunction if used near ultrasonic cleaning equipment, high-frequency equipment, transceivers, cellular phones, inverters, or other devices that generate a high-frequency electric field. Refer to the OMRON website ([www.ia.omron.com/](http://www.ia.omron.com/)) for typical measures.
- Laying the Sensor wiring in the same conduit or duct as high-voltage wires or power lines may result in incorrect operation and damage due to induction. Wire the Sensor using a separate conduit or independent conduit.
- Cleaning  
Never use thinner or other solvents. Otherwise, the Sensor surface may be dissolved.

### ● Design

#### Influence of Surrounding Metal

When the Proximity Sensor is embedded in metal, make sure that the clearances given in the following table are maintained. The values depend on the type of nuts used for mounting. Be sure to use the supplied nuts (SUS303).

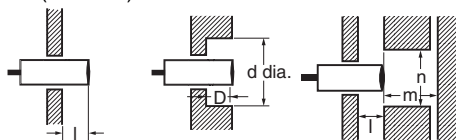

(Unit: mm)

Model	Item Embedding material	l	d	D	m	n
E2EF-(Q)X2D1	Iron	0	8	0	8	30
	Aluminum	10	50	10	8	50
E2EF-(Q)X3D1	Iron	0	12	0	12	40
	Aluminum	16	70	16	12	70
E2EF-(Q)X7D1	Iron	0	18	0	28	60
	Aluminum	16	80	16	28	80
E2EF-(Q)X12D1	Iron	0	30	0	48	100
	Aluminum	24	120	24	48	120


Note: The influence from other non-magnetic surrounding metals is nearly the same as that from aluminum.

### Mutual Interference

When installing two or more Sensors face-to-face or side-by-side, ensure that the minimum distances given in the following table are maintained.

(Unit: mm)

Model	Item	A	B
E2EF-(Q)X2D1		35	35
E2EF-(Q)X3D1		40	35
E2EF-(Q)X7D1		65	60
E2EF-(Q)X12D1		110	100

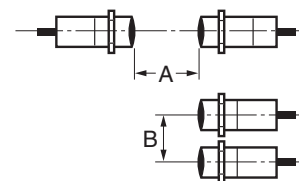


### Chips from Cutting Aluminum

Normally, chips from cutting aluminum will not cause a detection signal to be output even if it adheres to or accumulates on the detection surface. In the following cases, however, a detection signal may be output. Remove the cutting chips in these cases.

- If  $d \geq \frac{2}{3} D$  at the center of the detection surface where d is the cutting chip size and D is the detection surface size

(Unit: mm)

Model	Dimension	D
E2EF-(Q)X2D1		6
E2EF-(Q)X3D1		10
E2EF-(Q)X7D1		16
E2EF-(Q)X12D1		28

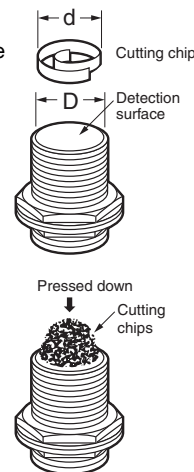


- If the cutting chips are pressed down

### ● Mounting

Do not tighten the nut with excessive force. A washer must be used with the nut. Do not use tightening force that exceeds the values in the following table.

Model	Torque
E2EF-(Q)X2D1	9 N·m
E2EF-(Q)X3D1	30 N·m
E2EF-(Q)X7D1	70 N·m
E2EF-(Q)X12D1	180 N·m



# E2EF


## Dimensions

(Unit: mm)  
Tolerance class IT16 applies to dimensions in this data sheet unless otherwise specified.


### Sensors

#### Pre-wired Models


##### E2EF-X2D1 -QX2D1

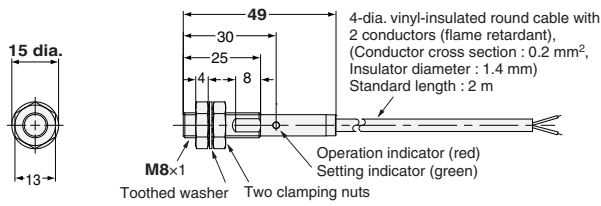


##### E2EF-X3D1 -QX3D1

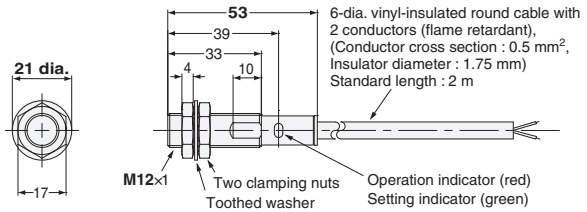

##### E2EF-X7D1 -QX7D1

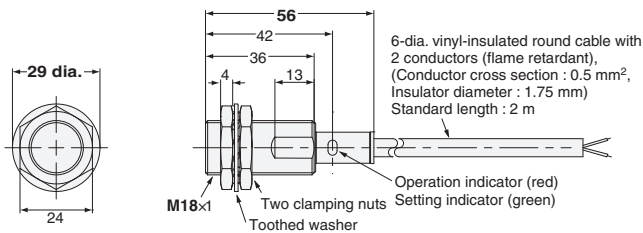


##### E2EF-X12D1 -QX12D1

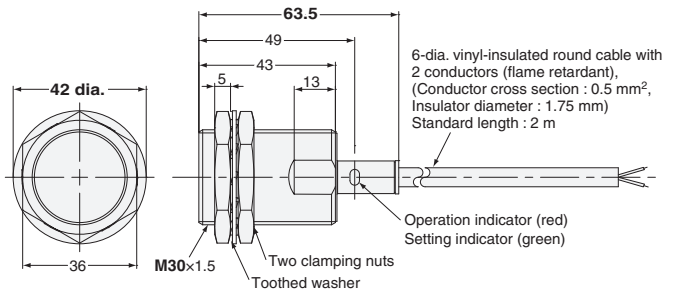


#### Smartclick Connector Models


##### E2EF-X2D1-M1TGJ -QX2D1-M1TGJ

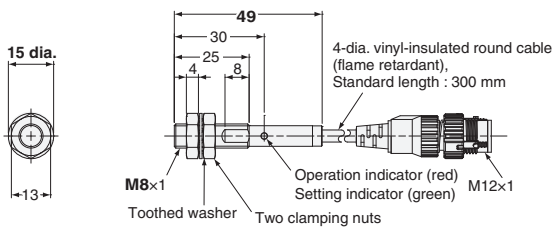


##### E2EF-X3D1-M1TGJ -QX3D1-M1TGJ

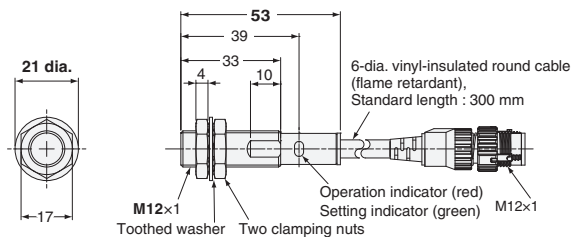

##### E2EF-X7D1-M1TGJ -QX7D1-M1TGJ

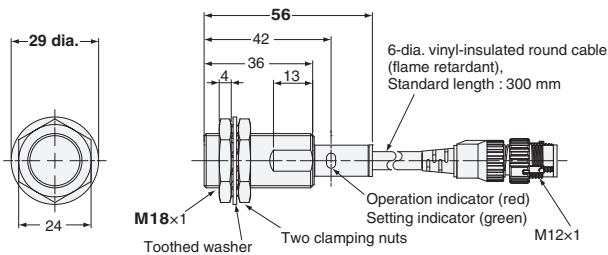

##### E2EF-X12D1-M1TGJ -QX12D1-M1TGJ

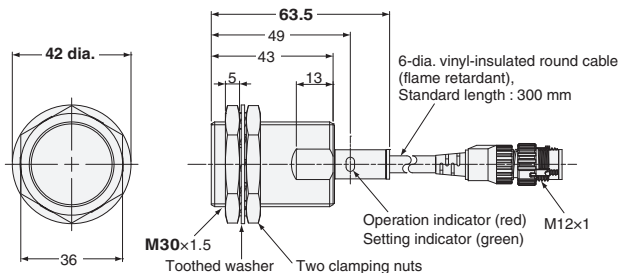

**OMRON Corporation** Industrial Automation Company  
Tokyo, JAPAN

Contact: [www.ia.omron.com](http://www.ia.omron.com)

#### Regional Headquarters

##### OMRON EUROPE B.V.

##### Sensor Business Unit

Carl-Benz-Str. 4, D-71154 Nufringen, Germany  
Tel: (49) 7032-811-0/Fax: (49) 7032-811-199

##### OMRON ASIA PACIFIC PTE. LTD.

No. 438A Alexandra Road # 05-05/08 (Lobby 2),  
Alexandra Technopark,  
Singapore 119967  
Tel: (65) 6835-3011/Fax: (65) 6835-2711

##### OMRON ELECTRONICS LLC

One Commerce Drive Schaumburg,  
IL 60173-5302 U.S.A.  
Tel: (1) 847-843-7900/Fax: (1) 847-843-7787

##### OMRON (CHINA) CO., LTD.

Room 2211, Bank of China Tower,  
200 Yin Cheng Zhong Road,  
PuDong New Area, Shanghai, 200120, China  
Tel: (86) 21-5037-2222/Fax: (86) 21-5037-2200

Authorized Distributor:

© OMRON Corporation 2012 All Rights Reserved.

In the interest of product improvement,  
specifications are subject to change without notice.

CSM\_4\_2\_0118

Cat. No. D114-E1-01

Printed in Japan

0912 (0912) (w)