
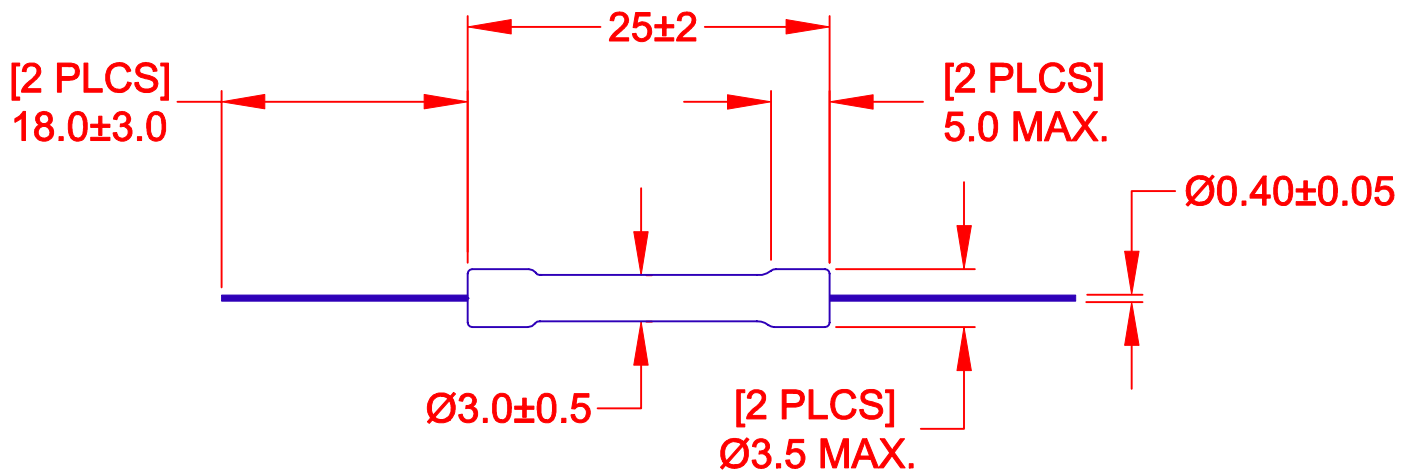


Spectral Radiance

Peak @ 436 nm

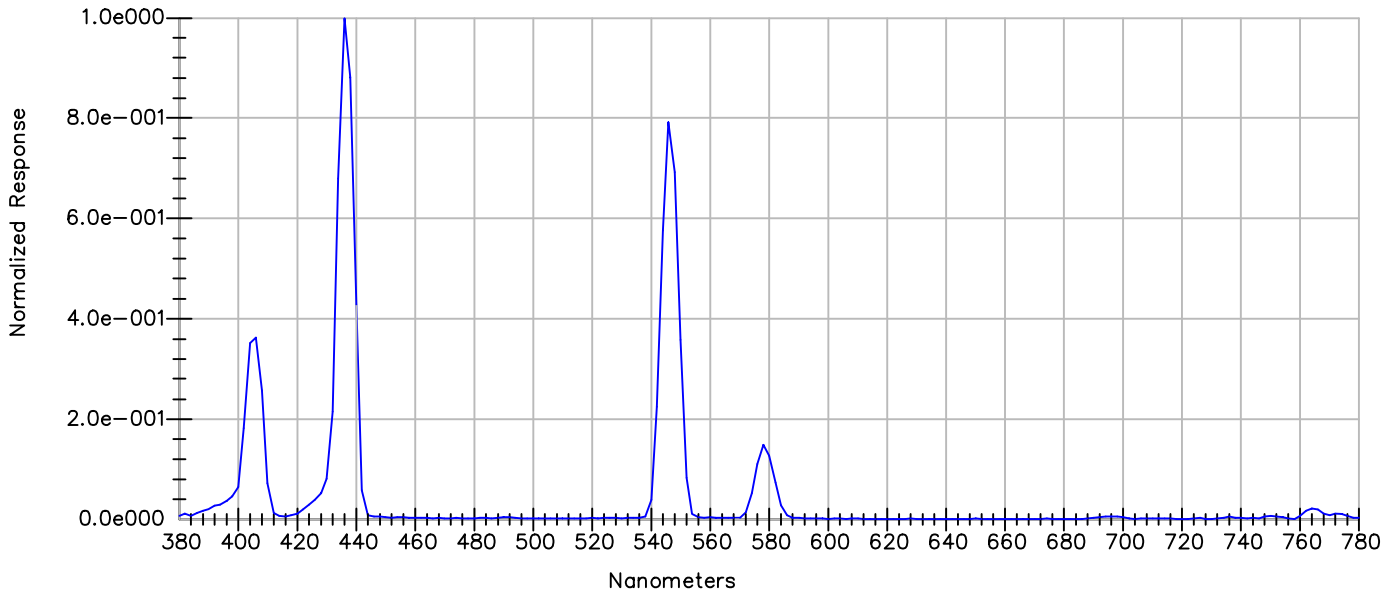

JKL LAMP PART NUMBER	OUTPUT	STARTING CIRCUIT VOLTAGE VS (Vrms)	OPERATING LAMP VOLTAGE VL (Vrms)	OPERATING LAMP CURRENT IL (mArms)	*RATED LIFE (HRS)
BF325-HG	(Hg) MERCURY SPECTRAL LINES	400 @ 25°C	165	5	7,500

\* RATED LIFE IS DEFINED AS THE POINT AT WHICH THE INTENSITY BECOMES 50% OF THE INITIAL.

NOTE: LAMP IS NOT RATED FOR ULTRAVIOLET RADIATION, ADEQUATE SHIELDING SHOULD BE USED TO PROTECT EYES FROM SHORT WAVELENGTH ULTRAVIOLET RADIATION.

<b>METRIC</b>  THIRD ANGLE PROJECTION		DIMENSIONS ARE IN MILLIMETERS TOLERANCE UNLESS OTHERWISE SPECIFIED 1 PL +/- 0 2 PL +/- 0 ANGLE +/- 0		<b>JKL COMPONENTS CORPORATION</b>					
DRAWN BY L. WENGSTROM		APPV'D BY DATE J.K. 11/22/04		SIZE <b>A</b>	FSCM NO. <b>55335</b>	DRAWING NO. <b>BF325-HG</b>			
RELEASED		11/22/04		TITLE MINIATURE COLD CATHODE FLUORESCENT LAMP					
REV. NO.	DESCRIPTION/ECO NUMBER	APPV'D DATE	- CAD DRAWING - MANUAL REVISIONS NOT PERMITTED		SCALE NONE	RELEASED DATE 11/22/04	REVISION DATE	REV. NO.	SHEET 1 OF 1